


Circuit:

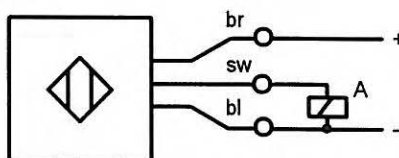

br = brown
sw = black
bl = blue

Electrical Characteristics:

Supply voltage range (V_B)	10 V to 30 V DC
Ripple voltage	10 %
Current consumption active	< 10 mA
passive	< 1 mA
Load current (I_L)	max. 200 mA
Reverse polarity protection	yes

Operating Characteristics - electrical:

Output saturation voltage	< 2 V @ 200 mA
Repetition rate of sensing	max. 800 Hz
Output voltage rise	> 2 V/ μ s
Operating time	100 %
Short circuit protection	pulsating
Output function	PNP - NO
Other switching characteristics are available on inquiry.	

Operating Characteristics - mechanical:

Nominal sensing distance (S_N)	2,5 mm
Hysteresis	typ. 0,1 mm
Reproduceability	< 0,01 mm
Cable	Resin sealed PVC cable 3×0,14 ²

Environmental Characteristics:

Housing material	PA
Sensing distance temperature drift	< 4 μ m/K
Operating temperature range	-30°C to +70°C
Seal	IP67 iaw DIN 40 050
EMC	iaw EN 50082 - 2 and EN 55011

1999	Date	Name	mm	Scale	 Elektrotechnik - GmbH & Co KG D - 72218 Wildberg	Order-Sign:
Design	22.02.	Kullick		1:1		L408.2118.25
Check		<i>Sn</i>	General Tolerances			
Appro			DIN ISO 2768 mK			01 018 868