



## with ball screw (KGT) and rail guide (SSS)

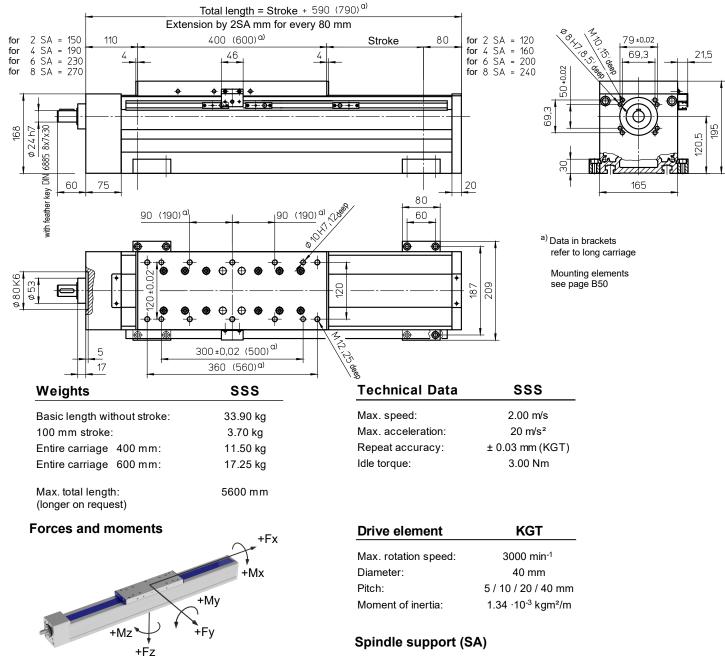

	SSS
Forces	Dynamic [N]
Fx	18000
Fy	5000
Fz	15000
-Fz	8000
Moments	Dynamic [Nm]
Mx	800
M <sub>Y</sub>	1800 (3000)
Mz	1400 (2000)

Data in brackets refer to long carriage plate (600)



Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA) Version with double nut ("MM") is only possible with long carriage plate (600) and not with pitch "5".

Release: 30.10.2023 Page B34