


with rack-and-pinion drive module 2 (helical)
and double linear guide (AZSS)

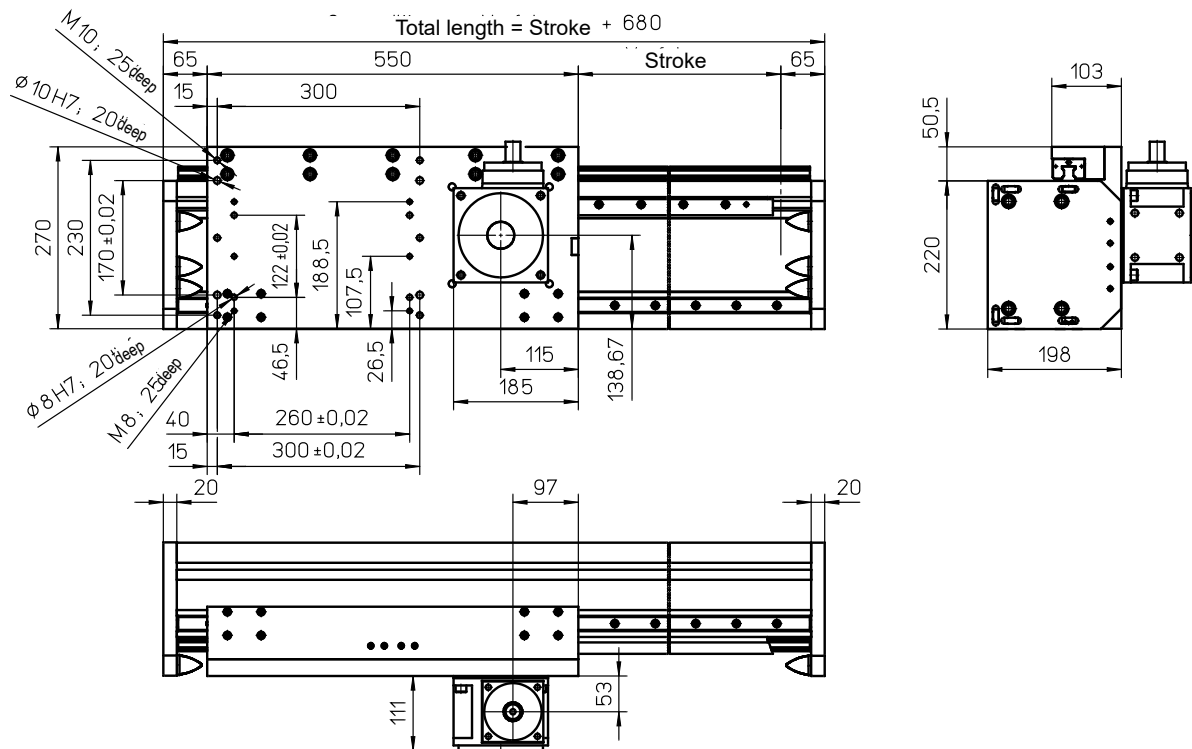


Weights

	AZSS
Basic length without stroke:	49.80 kg*
100 mm stroke:	4.60 kg
Carriage 550 mm:	18.10 kg
Gears D90 / D115:	10.35 / 16.70 kg

Max. total length: 8020 mm
(longer on request)

Forces and moments

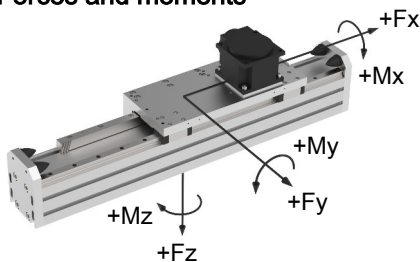

	AZSS-D90	AZSS-D115
Forces	Dynamic [N]	
F_x	3000-4000 **	5000-6000 **
F_y	20000	
F_z	20000	
Moments	Dynamic [Nm]	
M_x	4000	
M_y	8000	
M_z	8000	

Technical Data

	AZSS
Max. speed:	4.50 m/s (D90) / 4.00 m/s (D115)
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.05 mm
Idle torque at drive pinion:	7.2 Nm
Rack and pinion:	Module 2 helical
Drive pinion:	Module 2, 30 teeth
Stroke per pinion revolution:	200 mm
Servo-high-performance-gear:	DynaGear D90 / D115
Ratios:	5 / 10 / 15

	D90	D115
Load F_x	Dynamic [N]	
i = 5:1	4000	6000
i = 10:1		
i = 15:1	3000	5000

Preferred gear: D90

Efficiency of gears: > 96 %

Variants for gear mounting see page G29.

* inclusive standard gear

** depending on gear ratio (see table to right)