



Double nuts HSB (KGM-MM and KGM-FM)

- Double nuts are made by a combination of 2 single nuts; either 2 cylindrical nuts (MM) or one flanged nut and one cylindrical nut (FM)
- The pre-load can be selected by the customer as 3 %, 5 % or 7 % of the dynamic load rating of the ball screw nut.

• Cylindrical double nut KGM-MM

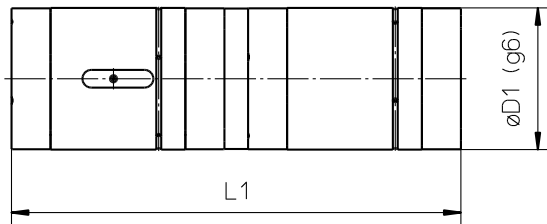

• Flanged double nut KGM-FM

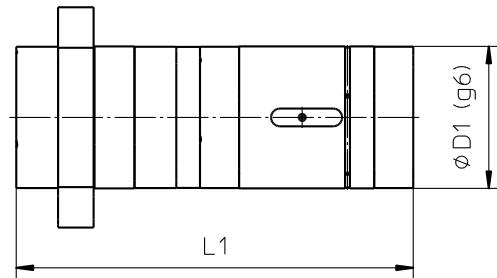

Nominal-Ø	Pitch	Outer-Ø	Total length	Number of starts
d_0	P_0	$D1$	$L1$	i
[mm]	[mm]	[mm]	[mm]	[]
16	5	28 / 32 *	74	1
	10	28 / 32 *	96	2
	20	28 / 32 *	74	4
20	5	35 / 36 *	73	1
	10	35 / 36 *	73	2
	20	35 / 36 *	73	4
	20 (long)	35 / 36 *	113	4
25	5	40	77.5	1
	05 (long)	40	97.5	1
	10	40	77.5	2
	10 (long)	40	97.5	2
	25	40	77.5	5
	25 (long)	40	127.5	5
32	5	50	95	1
	10	50	125	2
	20	50	115	4
40	5	146	63	1
	10	146	63	2
	20	146	63	4

* KGM-Ø MM / FM

The remaining technical data correspond to that of the single nuts.